



Ratio:Guard P-2 pH Monitor



Proper water pH is essential to success. Keeping track of pH levels has never been easier using the Ratio:Guard® pH Monitor. These monitors use an inline probe to constantly measure the pH of the water. These products require minimal upkeep consisting of an occasional cleaning and calibration. They are very durable and are designed to serve day in and day out.

Please call or email with any questions.

Gary Fay – Eastern Sales Manager
gary@heanderson.com

Randy Nester – HEA Sales
randy@heanderson.com


Peter Driver – Atlantic Field Sales
peter@heanderson.com

Bruce Walters – HEA Sales
bruce@heanderson.com



H.E. Anderson
COMPANY
www.heanderson.com
Phone 1-800-331-9620

Typical Installation

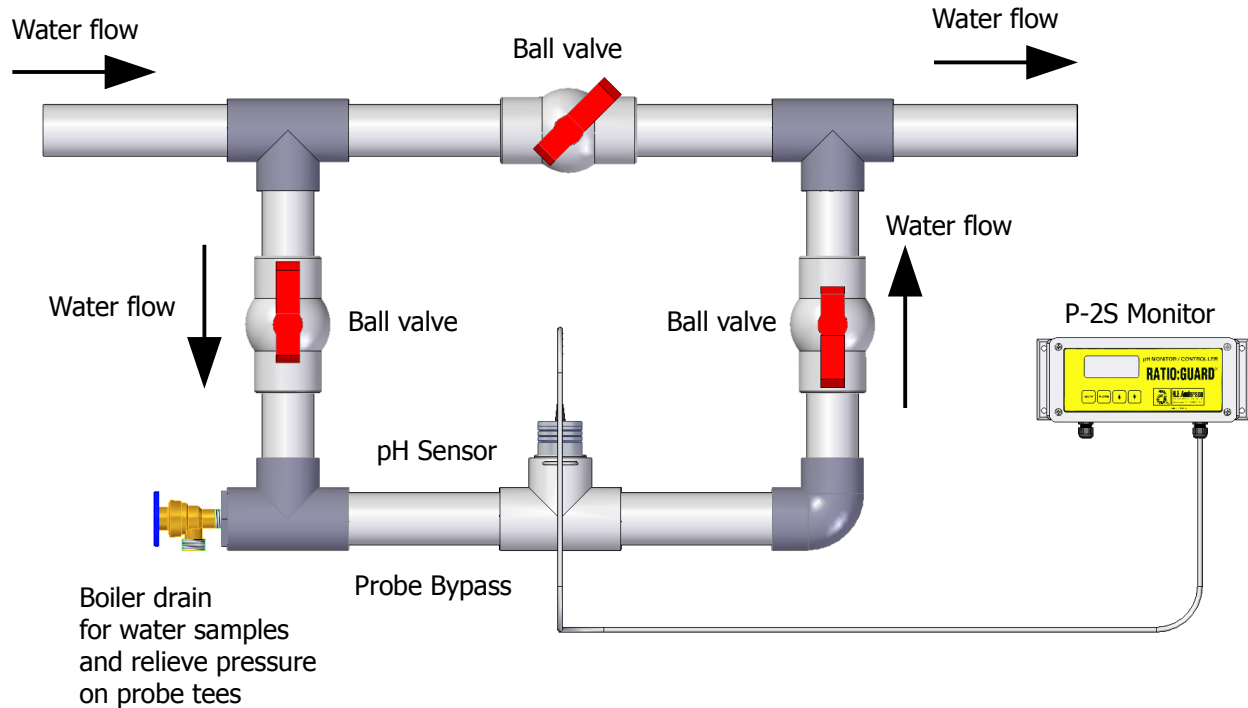

Features

- Easy installation and operation
- Continual indication ensures levels remain where they are intended
- Water resistant enclosure with gasket keeps monitor functioning in wet environments
- Large LCD Display makes unit easy to view
- 4 Button Key Pad makes programming and operation easy
- Probe, quick tee and cables are included to make unit easy to install
- Unique Probe Design maintains accuracy with long probe cable length
- 2 programmable relays can operate alarms or be used to turn pumps on or off
- 15 month warranty

Specifications

Operating Pressure	30 psi to 125 psi
Water Temp	33° to 140° F
Range	0 to 14 pH indication, 1 to 13 pH setpoint
Accuracy	0.05 pH @ 77°F (25°C)
Display	0.7 in. LCD
Outputs	10 amp SPDT contact outputs for both high and low alarms
Power	120 VAC (E-1S) or 12 VDC (E-1D)

Please call or email with any questions.

Gary Fay – Eastern Sales Manager
gary@heanderson.com

Randy Nester – HEA Sales
randy@heanderson.com

Peter Driver – Atlantic Field Sales
peter@heanderson.com

Bruce Walters – HEA Sales
bruce@heanderson.com



H.E. Anderson
COMPANY
www.heanderson.com
Phone 1-800-331-9620